


# HILCO<sup>®</sup> SEAL GAS FILTER HOUSINGS



**HILCO**<sup>®</sup>  
FLUID MANAGEMENT SYSTEMS

# HILCO® SEAL GAS FILTER HOUSINGS

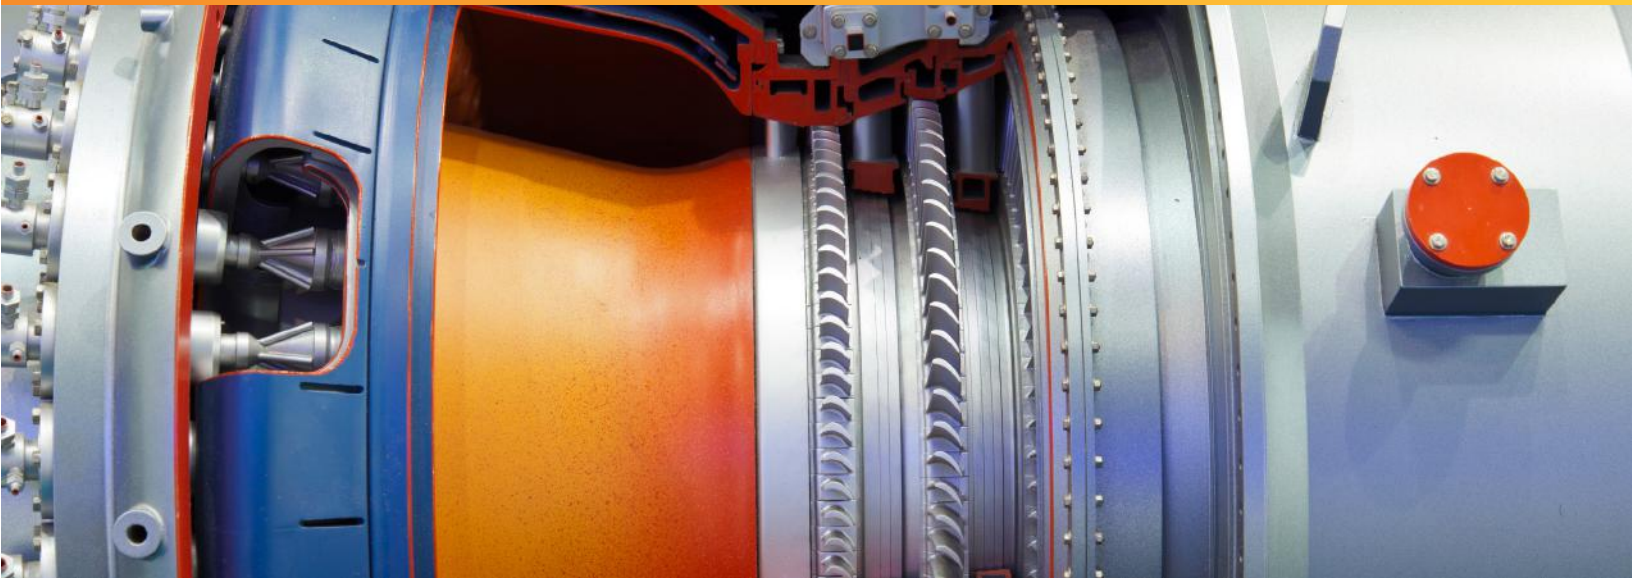

*HILCO® offers several designs* and sizes of seal gas filters for the purposes of particulate and liquid removal. Each one of our units is designed to the requirements provided by the customer. With our many years of experience, we are able to determine the best option for the application whether it is an initial startup or an aftermarket retrofit.

*HILCO® designs and manufactures three basic designs* of seal gas filters: **Welded Pipe Mount, Machined Floor Mount, and Welded Floor Mount** filters. All units are constructed using 316/316L stainless steel in either a simplex or duplex arrangement. Each configuration has its own advantages, but can be built to any design code offered by The Hilliard Corporation. All the units provided are designed and constructed to ASME Code SEC VIII, Div. 1, as well as API-614 design requirements.

*HILCO® also designs* and manufactures the cartridges used for both particulate removal and coalescing applications. These cartridges use different types of filtration media with different configurations to satisfy any and all filtration grade requirements. Refer to the cartridge brochure for additional information.

## Welded Pipe Mount Filters

- Designed to ensure no leakage by utilizing a zero-leak integral transfer valve.
- Compact to save space. Pipe mounting options reduce the floor space taken by the unit.
- Custom flange configurations are available to fit piping arrangements.
- Double Block and Bleed on Vent/Drain connections only, available upon request.
- Ideal flow configuration for coalescing.
- Recommended for applications <1000 PSI MAWP, and ≤1" Inlet/Outlet connection size.
- Available up to 4000 psi.



## Machined Floor Mount Filters

- Machined Floor Mount units are used in high pressure applications. Constructed without welding.
- Uses ball valves for duplex assemblies to ensure no leakage.
- Double Block and Bleed configuration on Inlet/Outlet and/or Vents/Drains available upon request.
- Recommended for applications  $>1000$  PSI MAWP, and  $\leq 1\text{-}1/2$ " Inlet/Outlet connection size.
- Available up to 10,000 psi.



## Welded Floor Mount Filters

- Welded Floor Mount units are the traditional configuration for higher pressures and flows that cannot be satisfied by Welded Pipe Mount units.
- Fabricated construction.
- Uses ball valves for duplex assemblies to ensure no leakage.
- Double Block and Bleed configuration on Inlet/Outlet and/or Vents/Drains available upon request.
- Reduced number of seals.
- Cost effective for larger flow rates and fluid capacities.
- Recommended for applications  $>1$ " Inlet/Outlet connection size.
- Available up to 4000 psi.






# Cost Effective Seal Gas Solutions by Design\*

Connection Size	<1000 psi	1000-2000 psi	2001-3000 psi	>3000 psi
1/2"	<b>Pipe Mounted, Welded</b>	<b>Floor Mounted, Machined</b>		
3/4"				
1"				
1-1/2"	<b>Floor Mounted, Welded</b>			
2"				

\*Suggested application of the different designs for the lowest cost. Designs are not limited per this table.

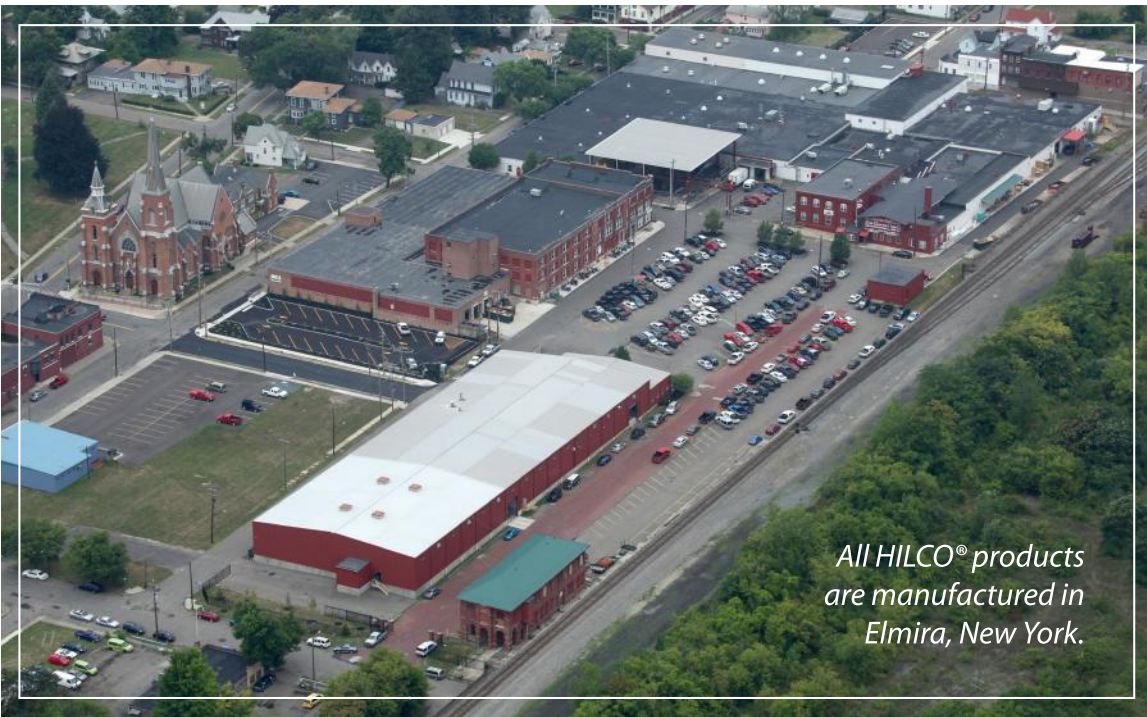

## The Hilliard Corporation

100 West Fourth Street  
 Elmira, New York  
 14902-1504 USA  
 PH: 607.733.7121 | FAX: 607.737.1108  
 hilliardcorp.com | hilliard@hilliardcorp.com

YOUR LOCAL REPRESENTATIVE:



SGF-1  
 SBC 10/15